



### 产品特点

- 1体式浮动球阀设计
- ISO5211安装平台
- 防静电阀杆
- PN16/25/40
- 美标150LB 300LB
- 日标10K 20K
- 带碟簧直密封设计
- 铸造手柄中头压盖自紧设计

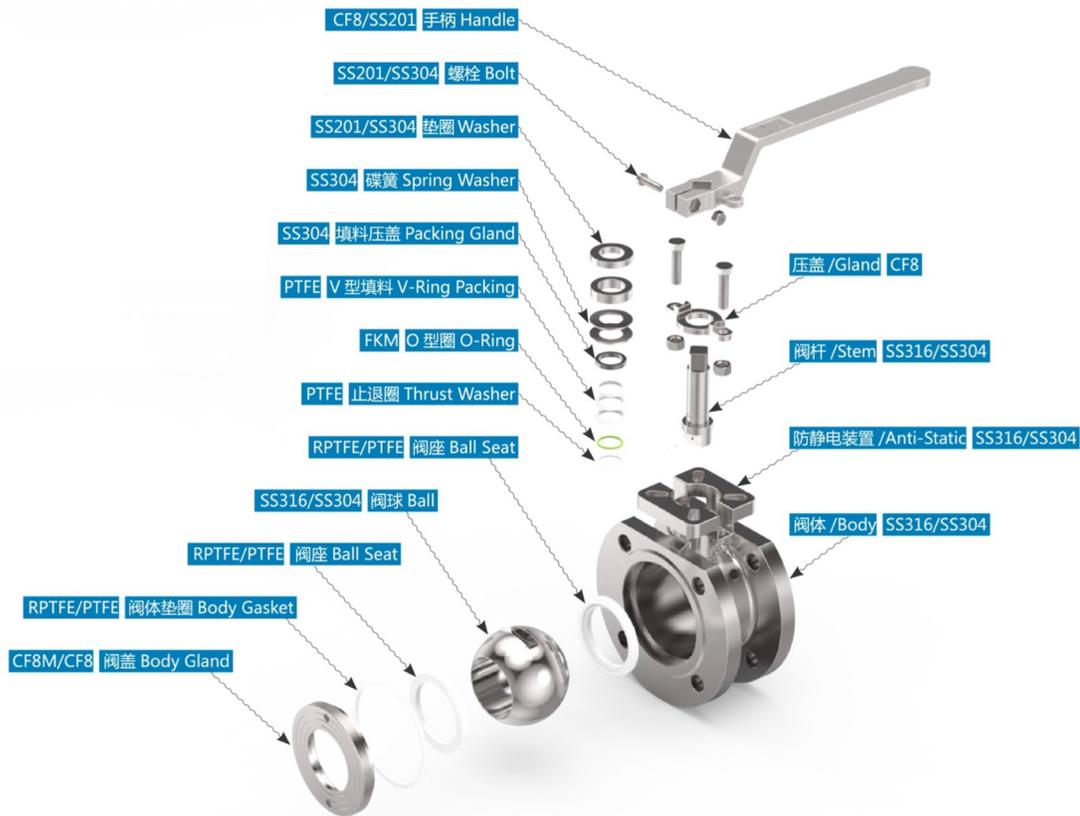

### rotokr 货号说明

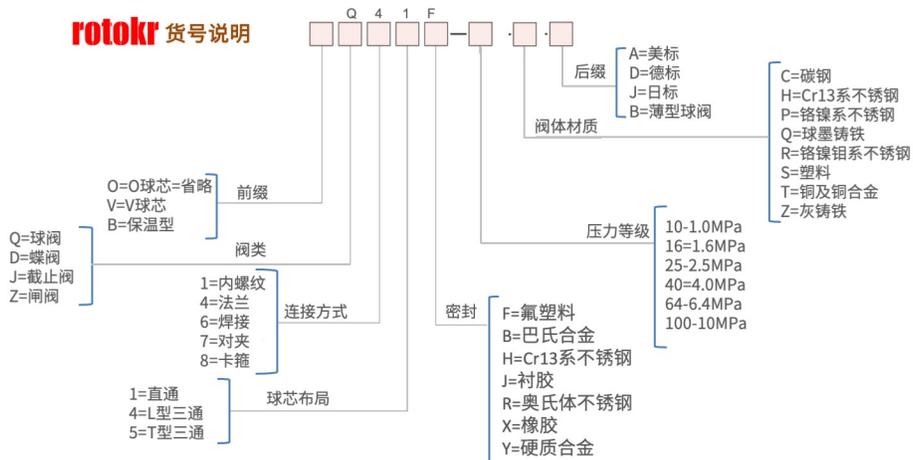

# BALL VALVE

>>> FLUID CONTROL SYSTEMS <<<<


WWW.ROTOKR.COM

# Q41F-16PB

薄型法兰球阀

设计标准: EN 12516-1  
 法兰标准: DIN 1092-1  
 测试标准: EN 12266

Design Standard: EN 12516-1  
 Flange Standard: DIN 1092-1  
 Test Standard: EN 12266

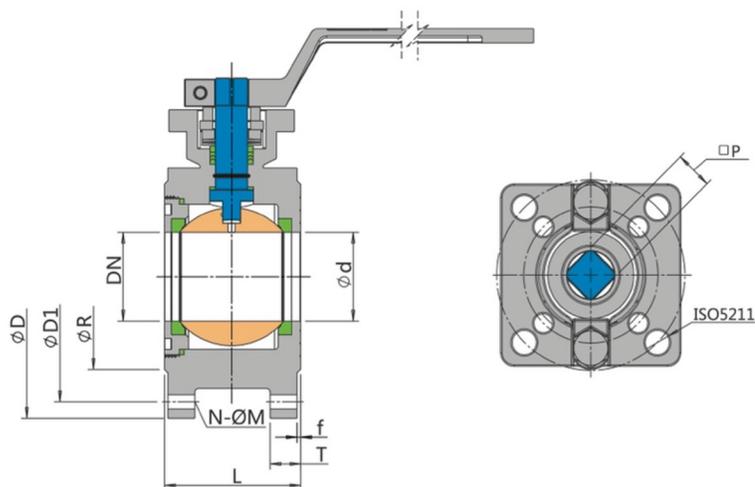

## PN10/16

unit:mm

DN	d	L	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	42	95	65	45	2	16	4	14	9	F03	F05
3/4"	20	44	105	75	55	2	18	4	14	9	F03	F05
1"	25	50	115	85	65	2	18	4	14	11	F04	F05
1-1/4"	32	60	140	100	78	2	18	4	18	11	F04	F05
1-1/2"	38	65	150	110	85	2	18	4	18	14	F05	F07
2"	49	80	165	125	100	2	18	4	18	14	F05	F07
2-1/2"	65	110	185	145	120	2	18	8	18	17	F07	F10
3"	78	120	200	160	135	2	20	8	18	17	F07	F10
4"	98	150	220	180	155	2	20	8	18	22	F07	F10
5"	125	180	250	210	185	2	22	8	18	22	F10	F12
6"	150	225	285	240	210	2	22	8	22	27	F12	F14

## PN25/40

DN	d	L	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	42	95	65	45	2	16	4	14	9	F03	F05
3/4"	20	44	105	75	55	2	18	4	14	9	F03	F05
1"	25	50	115	85	65	2	18	4	14	11	F04	F05
1-1/4"	32	60	140	100	78	2	18	4	18	11	F04	F05
1-1/2"	38	65	150	110	85	2	18	4	18	14	F05	F07
2"	49	80	165	125	100	2	20	4	18	14	F05	F07
2-1/2"	65	113	185	145	120	2	22	8	18	17	F07	F10
3"	78	120	200	160	135	2	24	8	18	17	F07	F10
4"	98	154	235	190	160	2	24	8	22	22	F07	F10
5"	125	180	270	220	188	2	26	8	26	22	F10	F12
6"	150	225	300	250	218	2	28	8	26	27	F12	F14