



产品特点

- 3通式浮动球阀设计
- ISO5211安装平台
- 防静电阀杆
- PN16/25/40
- 美标150LB 300LB
- 日标10K 20K
- 带碟簧直密封设计
- 铸造手柄中头压盖自紧设计
- 3通4阀座设计

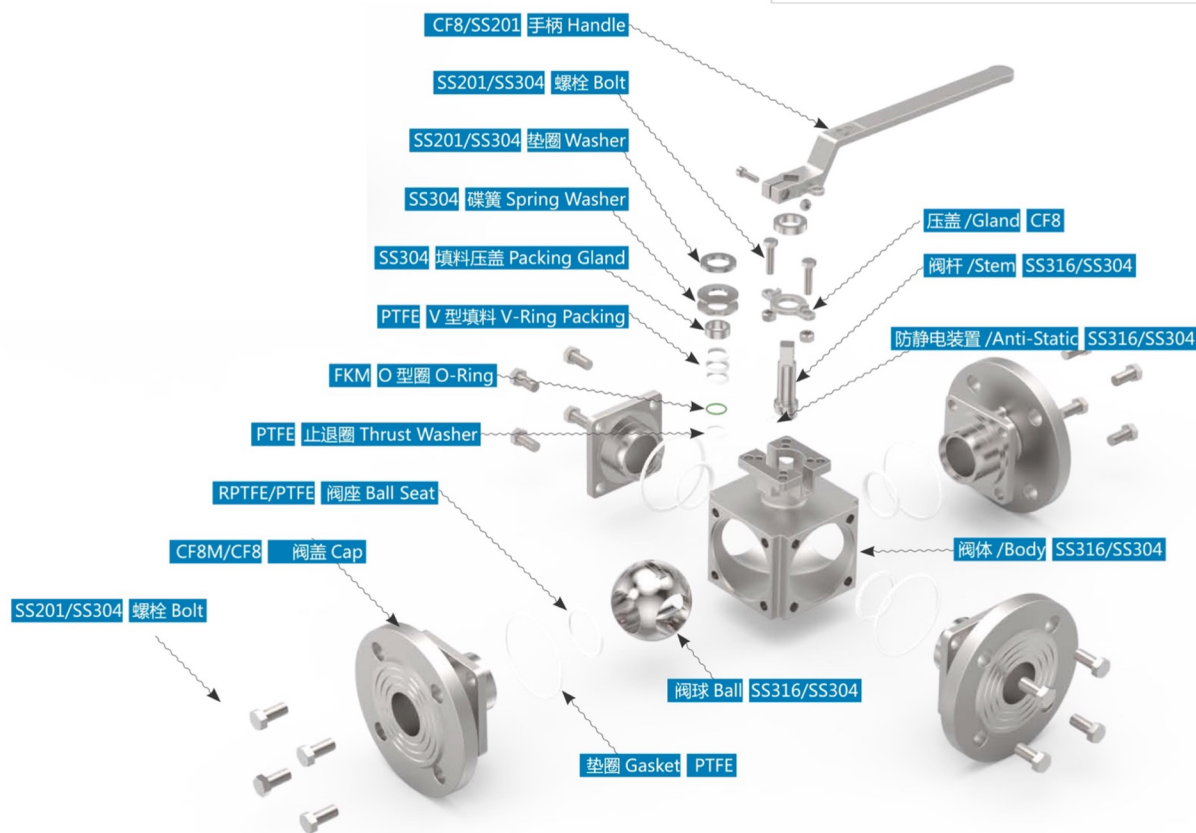

rotokr 货号说明

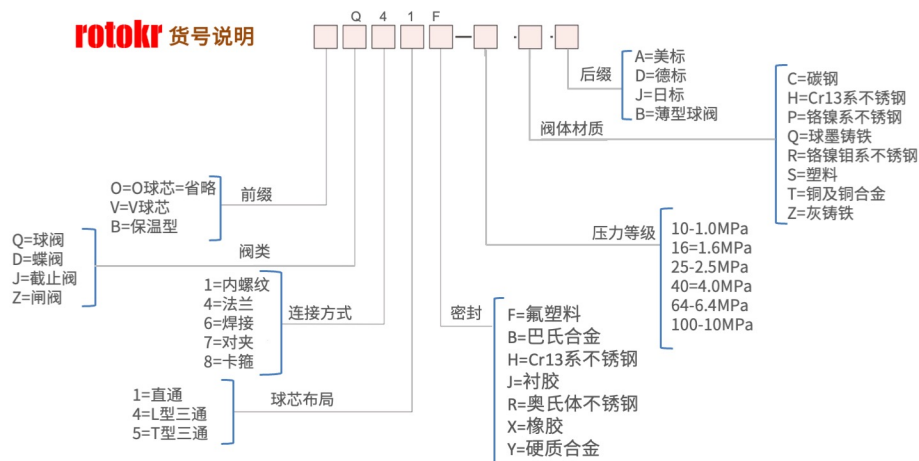

BALL VALVE

>>> FLUID CONTROL SYSTEMS <<<


WWW.ROTOKR.COM

Q44/Q45

三通法兰球阀

设计标准: ASME B16.34
法兰标准: ASME B16.5
测试标准: API598

Design Standard: ASME B16.34
Flange Standard: ASME B16.5
Test Standard: API598

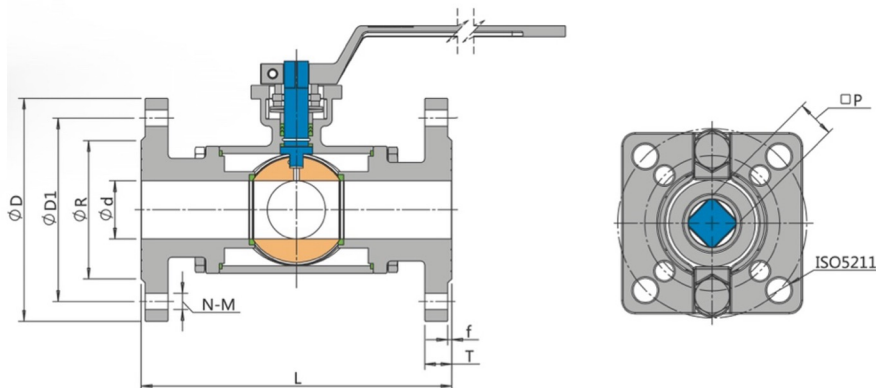

L-Port L 型



T-Port T 型



Class 150LB

unit:mm

DN	d	L	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	150	90	60.3	34.9	2	9.6	4	16	9	F03	F05
3/4"	20	165	100	69.9	42.9	2	11.2	4	16	9	F03	F05
1"	25	181	110	79.4	50.8	2	12.7	4	16	11	F04	F05
1-1/4"	32	190	115	88.9	63.5	2	14.3	4	16	11	F04	F05
1-1/2"	38	212	125	98.4	73	2	15.9	4	16	14	F05	F07
2"	49	230	150	120.7	92.1	2	17.5	4	19	14	F05	F07
2-1/2"	65	290	180	139.7	104.8	2	20.7	4	19	17	F07	F10
3"	78	310	190	152.4	127	2	22.3	4	19	17	F07	F10
4"	98	367	230	190.5	157.2	2	20	8	18	22	F07	F10

Class 300LB

DN	d	L	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	150	95	66.7	34.9	2	12.7	4	16	9	F03	F05
3/4"	20	165	115	82.6	42.9	2	14.3	4	19	9	F03	F05
1"	25	181	125	88.9	50.8	2	15.9	4	19	11	F04	F05
1-1/4"	32	207	135	98.4	63.5	2	17.5	4	19	11	F04	F05
1-1/2"	38	234	155	114.3	73	2	19.1	4	22	14	F05	F07
2"	49	258	165	127	92.1	2	20.7	8	19	14	F05	F07
2-1/2"	65	316	190	149.2	104.8	2	23.9	8	22	17	F07	F10
3"	78	360	210	168.3	127	2	27	8	22	17	F07	F10
4"	98	398	255	200	157.2	2	30.2	8	22	22	F07	F10

BALL VALVE

>>>FLUID CONTROL SYSTEMS<<<


WWW.ROTOKR.COM

Q44/Q45

三通法兰球阀

设计标准: EN 12516-1
法兰标准: DIN 1092-1
测试标准: EN 12266

Design Standard: EN 12516-1
Flange Standard: DIN 1092-1
Test Standard: EN 12266

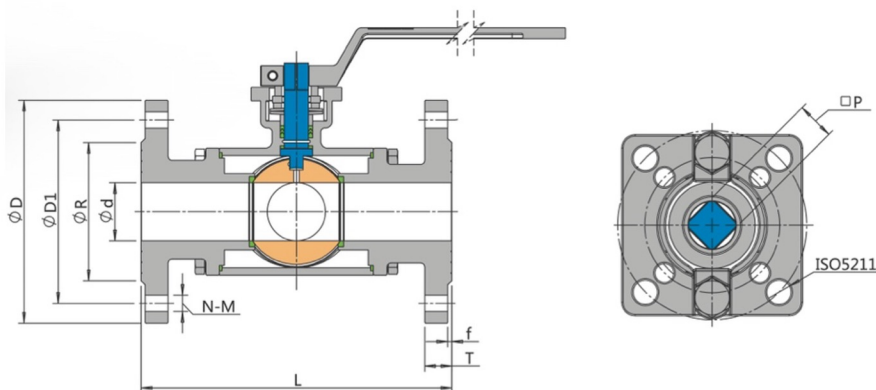

L-Port L 型



T-Port T 型



PN10/16

unit:mm

DN	d	L	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	150	95	65	45	2	16	4	14	9	F03	F05
3/4"	20	165	105	75	55	2	18	4	14	9	F03	F05
1"	25	181	115	85	65	2	18	4	14	11	F04	F05
1-1/4"	32	190	140	100	78	2	18	4	18	11	F04	F05
1-1/2"	38	212	150	110	85	2	18	4	18	14	F05	F07
2"	49	230	165	125	100	2	18	4	18	14	F05	F07
2-1/2"	65	290	185	145	120	2	18	8	18	17	F07	F10
3"	78	310	200	160	135	2	20	8	18	17	F07	F10
4"	98	350	220	180	155	2	20	8	18	22	F07	F10

PN25/40

DN	d	L(PN40)	D	D1	R	f	T	N	ØM	P	ISO5211	
1/2"	15	150	95	65	45	2	16	4	14	9	F03	F05
3/4"	20	165	105	75	55	2	18	4	14	9	F03	F05
1"	25	181	115	85	65	2	18	4	14	11	F04	F05
1-1/4"	32	190	140	100	78	2	18	4	18	11	F04	F05
1-1/2"	38	212	150	110	85	2	18	4	18	14	F05	F07
2"	49	230	165	125	100	2	20	4	18	14	F05	F07
2-1/2"	65	290	185	145	120	2	22	8	18	17	F07	F10
3"	78	340	200	160	135	2	24	8	18	17	F07	F10
4"	98	386	235	190	160	2	24	8	22	22	F07	F10